



## XM7370

Reliability. Security. Productivity.



Please contact us for more information



DMIB inc.  
16628 boul. de Pierrefonds  
Sainte-Geneviève

514-626-1520  
info@dmib.com  
dmib.com



This is a Class A device according to international electromagnetic emissions standards (i.e., FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

# Lexmark XM7370

With output up to 70 ppm\*, long-life imaging components, Ultra-High-Yield toner capacity, exceptional durability and complete finishing options, the XM7370 is Lexmark's large-workgroup monochrome leader. A 10-inch class/25-cm touch screen with e-Task interface keeps you informed and in control, whether you connect via Ethernet, USB or simple mobile printing options.



## Get more done

- ▶ Powerful 1.2-GHz quad-core processor and up to 6 GB of memory drives printing at up to 70 ppm\* and scanning at up to 150 sides per minute.
- ▶ Robust paper handling includes reliable feeding of a wide range of media types and sizes and up to 1,200 sheets of standard input.
- ▶ Connect via Ethernet, USB, or simple mobile printing options.
- ▶ Staple and hole-punch finishing options add a polished and professional look.

## Interact with ease

- ▶ Intuitive 10-inch class/25-cm color touch screen offers smooth, tablet-like interaction with customizable convenience and productivity apps.
- ▶ Front access to the paper path and power button means you'll virtually never have to access the back of the device, allowing placement in or on cabinets.
- ▶ Innovative serviceability features, starting with singledoor access to parts and supplies, help you resolve problems quickly.

## Ready when you are

- ▶ Long-life fuser and imaging components extend uptime.
- ▶ Unison™ Toner replacement cartridges deliver up to 45,000 pages\*\* of high-quality printing.
- ▶ Steel frame and durable design stands up to heavy use and harsh environments.

## Full-spectrum security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device and over the network.
- ▶ Keypoint Intelligence - Buyers Lab honored Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security\*\*\*.



## Built for planet earth


- ▶ Energy management features reduce power consumption in active use or sleep mode.
- ▶ Standard two-sided printing saves paper.
- ▶ Device is rated EPEAT® Gold- and ENERGY STAR-® certified.
- ▶ Recycle cartridges through the award-winning Lexmark Cartridge Collection Program (LCCP).

\*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\*Average yield based on approximately 5% print coverage.

\*\*\*Award based on North America and/or Western Europe data

# Lexmark XM7370

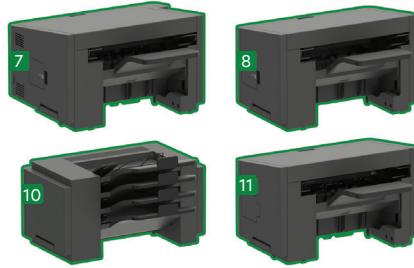

- 1 Multifunction product with 10-inch (25 cm) class e-Task color touch screen  
45.3 x 27.0 x 27.3 inches  
1150.6 x 685.8 x 693.4 mm
- 2 100-sheet multipurpose feeder  
Dimensions included as part of base model
- 3 550-sheet tray  
Dimensions included as part of base model
- 4 550-sheet tray  
Dimensions included as part of base model
- 5 550-sheet tray  
4.3 x 22 x 20 inches  
110 x 559 x 508mm
- 6 Caster base  
Dimensions included as part of base model

- 7 Staple, hole punch finisher  
10.3 x 18.2 x 20.0 inches  
263 x 462 x 507 mm
- 8 Staple finisher  
9.7 x 17.1 x 16.3 inches  
246 x 435 x 414 mm
- 9 Keyboard  
1 x 11 x 5.1 inches  
25 x 280 x 130 mm
- 10 4-Bin mailbox  
10.7 x 16.6 x 15.1 inches  
272 x 421 x 384 mm
- 11 Offset stacker  
9.7 x 17.1 x 16.3 inches  
246 x 435 x 414 mm

Standard  
 Optional

|            |  |
|------------|--|
| <b>P/N</b> | <b>Hardware</b>  |
| 25B1204    | Lexmark XM7370   |
| <b>P/N</b> | <b>Cartridges and supplies</b>                               |
| 25B3090    | Black Lexmark toner cartridge                                |
| 58D0Z00    | Imaging Unit   |
| 25A0013    | 3 staple cartridges  |
| <b>P/N</b> | <b>Paper handling</b>  |
| 25B2900    | 550-sheet-tray   |
| 25B2950    | 2100-sheet tray  |
| 25B2999    | Offset stacker   |
| 50G0849    | Staple, hole punch finisher                                  |
| 50G0850    | Staple finisher  |
| 50G0852    | 4-Bin mailbox  |
| <b>P/N</b> | <b>Memory options</b>  |
| 57X9801    | User flash   |
| 57X0204    | Memory expansion (4GB) DDR3                                  |
| <b>P/N</b> | <b>Connectivity</b>  |
| 14F0100    | RS-232C serial interface card                                |
| 14F0000    | Parallel 1284-B interface card                               |
| 27X0142    | MarkNet N8230 fiber ethernet 100BASE-FX(LC), 1000BASE-SX(LC) |
| 27X6510    | MarkNet N8370 802.11a/b/g/n/ac 2.4/5GHz wireless             |
| 1021231    | 10-Foot Parallel Printer Cable                               |
| 1021294    | 2-Meter USB Printer Cable                                    |
| <b>P/N</b> | <b>Furniture and accessories</b>                             |
| 57X7040    | Keyboard   |
| 57X7030    | Keyboard kit (English)                                       |
| <b>P/N</b> | <b>User replaceable parts</b>                                |
| 41X2352    | Roller kit   |
| 41X2351    | ADF maintenance kit  |
| 41X1108    | Media pick roller (input tray)                               |
| 41X1119    | Tray separator (input tray)                                  |
| 41X1076    | Transfer roller  |
| 41X0358    | ADF media pick roller  |
| 41X0360    | ADF Separation Roller and cover                              |
| 41X1123    | Multipurpose feeder pick roller                              |

For fusers and fuser maintenance kits, contact your service provider.

For application solutions see <https://www.lexmark.com/epg>

Note 1: Supports up to 2 optional 550-sheet trays.

Note 2: Supports one optional staple, hole punch finisher; OR one optional staple finisher; OR one optional 4-bin mailbox; OR one optional offset stacker.

Note 3: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

© 2018 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint® and the AirPrint Logo® are trademarks of Apple, Inc. ENERGY STAR® is a U.S. registered mark. Google Cloud Print™ is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. All other trademarks are the property of their respective owners. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

## Product specifications

## Lexmark XM7370

### Printing

|  |  |
|--|--|
| Display  | Lexmark e-Task 10-inch (25 cm) class colour touch screen                                     |
| Print Speed: Up to <sup>6</sup>                | Black: 70 ppm  |
| Time to First Page: As fast as                 | Black: 4.0 seconds   |
| Print Resolution                               | Black: 1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 300 x 300 dpi, 600 x 600 dpi |
| Memory   | Standard: 2048 MB / Maximum: 6144 MB   |
| Hard Disk                                      | Included in configuration  |
| Recommended Monthly Page Volume <sup>2</sup>   | 5000 - 100000 pages  |
| Maximum Monthly Duty Cycle: Up to <sup>3</sup> | 350000 pages per month   |

### Copying

|                                |                    |
|--------------------------------|--------------------|
| Copy Speed: Up to <sup>6</sup> | Black: 70 cpm      |
| Time to First Copy: as fast as | Black: 4.0 seconds |

### Scanning

|                                  |  |
|----------------------------------|--|
| Scanner Type / ADF Scan          | Flatbed scanner with ADF / DADF (single pass Duplex)                   |
| A4/Ltr Duplex Scan Speed: Up to  | Black: 144 / 150 sides per minute / Colour: 144 / 150 sides per minute |
| A4/Ltr Simplex Scan Speed: Up to | Black: 72 / 75 sides per minute / Colour: 72 / 75 sides per minute     |
| ADF Paper Input Capacity: Up to  | 200 pages 20 lb or 75 gsm bond   |

### Faxing

|             |  |
|-------------|--|
| Modem Speed | Max is 33,600 bps, V.34 Half-Duplex Kbps |
|-------------|--|

### Supplies<sup>7</sup>

|   |   |
|---|---|
| Laser Cartridge Yields (up to) <sup>1</sup>     | 45,000-page Extra High Yield Cartridge  |
| Imaging Unit Estimated Yield: Up to             | 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage |
| Cartridge(s) Shipping with Product <sup>1</sup> | 11,000-page Starter Return Program Toner Cartridge                                    |

### Paper Handling

|                              |   |
|------------------------------|---|
| Included Paper Handling      | 550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex, 550-Sheet Tray   |
| Optional Paper Handling      | 550-Sheet Tray, 2100-Sheet Tray   |
| Paper Input Capacity: Up to  | Standard: 1200 pages 20 lb or 75 gsm bond / Maximum: 3300 pages 20 lb or 75 gsm bond  |
| Paper Output Capacity: Up to | Standard: 550 pages 20 lb or 75 gsm bond / Maximum: 1050 pages 20 lb or 75 gsm bond   |
| Media Types Supported        | Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide                  |
| Media Sizes Supported        | 10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6 |

### General Information<sup>4</sup>

|   |  |
|---|--|
| Standard Ports                                | One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A) |
| Optional Network Ports / Optional Local Ports | Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel  |
| Noise Level: Operating                        | Print: 56 dBA / Copy: 59 dBA / Scan: 57 dBA  |
| Specified Operating Environment               | Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)   |
| Size (mm - H x W x D) / Weight                | 1150.6 x 685.8 x 693.4 mm / 67.0 kg  |

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

**This is a Class A device according to international electromagnetic emissions standards (i.e., FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.**

<sup>1</sup>Average yield at approximately 5% print coverage per colour. <sup>2</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup>Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details. <sup>5</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. <sup>6</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds). <sup>7</sup>Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details.